



Lowest Price Nichrome Alloy Cr20Ni80 Ni80 Wire Cr15Ni60 Electric Resistance Wire

Our Product Introduction

for more products please visit us on victory-alloy.com

Basic Information

- Place of Origin: China
- Brand Name: Victory
- Certification: CE
- Model Number: Cr20Ni80
- Minimum Order Quantity: 5
- Packaging Details: Spool package with Carton box, Coil package with polybag for Resistance wire
- Delivery Time: 5-21 days
- Payment Terms: L/C, T/T, Western Union, MoneyGram
- Supply Ability: 300 tons per month



Product Specification

- Material: Nickel, Chromium
- Nickel(Min): 77%
- Resistivity: 1.09+/-0.05
- Tensile Strength: 637MPA
- Elongation: ≥20%
- Application: Heating, Resistivity
- Condition: Hard / Soft
- Surface: Bright, Oxided, Acide
- Delivery Time: 7-20 Days
- Name: Resistance Wire
- Highlight: **Cr20Ni80 Nichrome Alloy Wire, Nichrome Alloy Wire NiCr 8020, 10mm nichrome 80 20**



More Images



Product Description

Nickel Chrome Resistance Alloy Wire Cr20Ni80, NiCr 8020 Nichrome Wire

NiCr Series

Nichrome wire, specifically the Cr20Ni80 alloy, is highly valued for its unique properties. When heated, it exhibits a minimum electrical resistance, making it ideal for use in electrothermal equipment. Additionally, it possesses elevated temperature strength and high ductility, allowing for various forms of machining such as chiseling, welding, stamping, and drawing. The alloy also holds its shape well, adding to its durability and reliability.

Despite its high price, the performance of Nichrome wire justifies the cost. The Cr20Ni80 and Cr15Ni60 alloys are the most popular brands due to their exceptional properties. H20N80 comprises 20% chromium and 80% nickel, resulting in a resistivity of 650 Ohms/cm and a melting temperature

Our Product Introduction

of 1200°C.

Overall, Nichrome wire is a versatile and reliable material that is widely used in the electrical industry. Its unique properties make it an excellent choice for heating applications and other forms of electrothermal equipment. Despite its cost, the durability and reliability of this alloy make it a worthwhile investment.

Size dimension range:

Wire: 0.01-10mm

Ribbons: 0.05*0.2-2.0*6.0mm

Strip: 0.05*5.0-5.0*250mm


NiCr series: Cr20Ni80, Cr30Ni70, Cr15Ni60, Cr20Ni35, Cr20Ni30

Performance material		Cr10Ni90	Cr20Ni80	Cr30Ni70	Cr15Ni60	Cr20Ni35
Composición	Ni	90	Rest	Rest	55.0 61.0	34.0 37.0
	Cr	10	20.0 23.0	28.0 31.0	15.0 18.0	18.0 21.0
	Fe		≤1.0	≤1.0	Rest	Rest
Temperatura máxima °C		1300	1200	1250	1150	1100
Punto de fusion °C		1400	1400	1380	1390	1390
Densidad g/cm3		8.7	8.4	8.1	8.2	7.9
Resistividad μΩ·m,20°C		0.76±0.05	1.09±0.05	1.18±0.05	1.12±0.05	1.00±0.05
Alargamiento a la ruptura		≥20	≥20	≥20	≥20	≥20
Calor específico J/g.°C			0.44	0.461	0.494	0.5
Conductividad térmica KJ/m.h°C			60.3	45.2	45.2	43.8
Coeficiente de expansión de líneas α×10-6/(20 1000°C)			18	17	17	19
Estructura micrográfica			Austenite	Austenite	Austenite	Austenite
Propiedades magnéticas			Nonmagnetic	Nonmagnetic	Nonmagnetic	Weak magnetic

Form	Specification	
Wire	Diameter=0.025mm~8mm	
Flat wire	Width=0.40~6.0mm	Thick=0.03~0.50mm
Strip	width=8~250mm	Thick=0.05~3.0mm
Bar	Diameter=8~100mm	Long=50~1000



Shape	Size(mm)
Wire	0.05-7.5
Rod	8-50
Ribbon	(0.05-0.35)*(0.5-6.0)
Strip	(0.5-2.5)*(5-40)

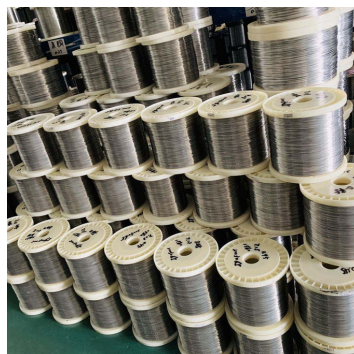



+8619906119641



victory@dlx-alloy.com



victory-alloy.com

NO.32 West Taihu Road, Xinbei District, Changzhou, Jiangsu