

High Quality Mineral Insulated Cable Stainless Steel Sheath Material Thermocouple Sheath Mi Cable

for more products please visit us on victory-alloy.com

Basic Information	
Place of Origin:	China
Brand Name:	Victory
Certification:	CE,ROHS,ISO 9001
Model Number:	K,N,E,J,T,B,R,S Types
Minimum Order Quantity:	5 Kg
Price:	50 - 499 meters \$3.00
Packaging Details:	Spool package with Carton box, Coil package with polybag
Delivery Time:	5-21 days
 Payment Terms: 	L/C, T/T, Western Union, MoneyGram
 Supply Ability: 	300 tons per month



Product Specification

 Product Name: 	MI Thermocouple Cable
• Warranty:	1 Year
Conductor Material:	NiCr-NiSi,NiCrSi-NiSi, NiCr-Konstantan, Fe- Konstantan, Cu-Kon
Sheath Material:	SS304,SS321, SS316, SS310, INCL600,601, Nicrobell,SS446
• Dia(mm):	0.25mm To 12.7mm
 Insulator: 	99.6% High Purity MgO
 Temperature Range: 	0~1100(°C)
• Size:	Customized Size
 Customized Support: 	OEM, ODM, OBM, Software Reengineering
 Application: 	Temperature Measuring
• Highlight:	JN Mineral Insulated Thermocouple Cable, Type J Mineral Insulated Thermocouple Cable, Extension Grade mi heating cable



More Images





Product Description

		44		H H	T IN	HERN					BLE available		
Type: K, Conductr nsulator Core nur Sheath n Nicrobell Dia(mm) Applicati MOQ: 10 Certificat Making s Frade ter Payment	Aineral Insulat N, E, J, T or material: N : 99.6% high mber: 2, 4, 6 naterial: SS3 I,SS446,SS34 : from 0.25m on: connectir 00m te: ISO,SGS sample time: : rm: FOB, EX t term: T/T,W ge: Competiti	liCr-N purity 21(SS 47,800 m to 1 ng with all typ W, Cll esterr	liSi,Ni v MgO 3304), 0,800I 12.7m n thern n thern F, CFI n Unio	SS316, S H,825,INC m mocouple tock R R nn, L/C	S310, ONEL	INCL600,60 601,INCONE	1, EL625,GH4				an		
Cada			Miro (Component of	f the the								
Code		-		Component c	n une (ne	annocoupie		- Noact	ivo Loc			_	
N				tive leg Si(NP)				- Negat Ni-Si-m	agnesiur	n (NN	1)		
К			Ni-Cr(()				Ni-Al(Si	•		,		
E			Ni-Cr(Cu-Ni (I					
J			Iron (J	JP)				Cu-Ni (JN)				
Т			Coppe	er (TP)				Cu-Ni (TN)				
В				um Rhodium				Platinur	n Rhodiu	ım -6'	%		
R				um Rhodium				Platinur					
S			Platin	um Rhodium	-10%			Platinur	11			-	
Material		Туре	;	Grad	Wor	king temperatu	re (deg)			Tol	erance		Standard
				е		g Term	Short						
NiCr-NiSi	I	К		1	-40~	1100	-40~1	300			5 deg		GB/T 2614-1
		1		2	-40~	.800	-40~9	00			5 deg 5 deg		GB/T 4993-
	Ji	F		1.1			40.3				5 deg		SD/1 7000*
NiCr-CuN	li	E		2				00			5 deg		GB/T 4994-
NiCr-CuN Fe-		E		2	-40~	600	-40~8					1.1	
NiCr-CuN					-40~	·600	-40~8			±2.	5 deg		
NiCr-CuN Fe-				1	_	~600)~300	-40~8 -200~	400			5 deg 5 deg		GB/T 2903-
NiCr-CuN Fe- Constant Cu-CuNi		J		1 2	-200	I~300	-200~	400 Sheath(m	m)o core	±0.	5 deg		GB/T 2903-
NiCr-CuN Fe- Constant Cu-CuNi Outer Shi	an eath(mm) Wall	J		1 2 1 core wire D K,N,E,J,T	-200	~300 S,R,B	-200~ Outer S mm) K,N		É,J,T	±0.	5 deg Dia.(B	GB/T 2903- Types
NiCr-CuN Fe- Constant Cu-CuNi Outer Sh	an eath(mm)	J		1 2 1 core wire D	-200	S,R,B Types	-200~ Outer S mm)	Sheath(m		±0.	5 deg Dia.(
NiCr-CuN Fe- Constant Cu-CuNi Outer Shi Outer Shi Dia	an eath(mm) Wall Thickness	J		1 2 1 core wire D K,N,E,J,T Types	-200	~300 S,R,B	Cuter S mm) K,N Types SS304 SS321	Sheath(m	E,J,T Types SS30, SS32,	±0.	5 deg Dia.(S,R Types INCL60	NI NI	Types ICL60, ICL80
NiCr-CuN Fe- Constant: Cu-CuNi Outer Shi Outer Shi Dia 0.5	an eath(mm) Wall Thickness 0.05-0.10	J		1 2 1 core wire D K,N,E,J,T Types 0.08-0.12	-200	S,R,B Types	Cuter 5 mm) K,N Types SS304 SS321 SS310 SS310	Sheath(m	E,J,T Types SS30,	±0.	5 deg Dia.(S,R Types	IN	Types ICL60, ICL80
NiCr-CuN Fe- Constant Cu-CuNi Outer Shi Outer Shi Dia 0.5 1.0	an eath(mm) Wall Thickness 0.05-0.10 0.10-0.20	J		1 2 1 core wire D K,N,E,J,T Types 0.08-0.12 0.15-0.20	-200	S,R,B Types 	Cuter S mm) K,N Types SS304 SS321 SS316	Sheath(m	E,J,T Types SS30, SS32, SS31	±0.	5 deg Dia.(S,R Types INCL60 iNCL80	NI NI	Types ICL60, ICL80
NiCr-CuN Fe- Constant Cu-CuNi Outer Shi Outer Shi Dia 0.5 1.0 1.5	an eath(mm) Wall Thickness 0.05-0.10 0.10-0.20 0.15-0.25	J		1 2 1 core wire D K,N,E,J,T Types 0.08-0.12 0.15-0.20 0.23-0.30	-200	>-300 S,R,B Types 0.25-	-200~ Outer \$ mm) K,N Types SS304 SS310 SS310 INCL60	Sheath(m	E,J,T Types SS30, SS32, SS31	±0.	5 deg Dia.(S,R Types INCL60 iNCL80	NI NI	Types ICL60, ICL80
NiCr-CuN Fe- Constant Cu-CuNi Outer Shi Outer Shi Dia 0.5 1.0 1.5 1.0 2.0	an eath(mm) Wall Thickness 0.05-0.10 0.10-0.20 0.15-0.25 0.16-0.26 0.25-0.35	J		1 2 1 core wire D K,N,E,J,T Types 0.08-0.12 0.15-0.20 0.23-0.30 0.26-0.36 0.40-0.50	-200	S,R,B Types 0.25- .030	-200~ Outer \$ mm) K,N Types SS304 SS310 SS310 INCL60	Sheath(m	E,J,T Types SS30, SS32, SS31	±0.	5 deg Dia.(S,R Types INCL60 iNCL80	NI NI	Types ICL60, ICL80
NiCr-CuN Fe- Constant Cu-CuNi Outer Shi Outer Shi Dia 0.5 1.0 1.5 1.6	an eath(mm) Wall Thickness 0.05-0.10 0.10-0.20 0.15-0.25 0.16-0.26	J		1 2 1 core wire D K,N,E,J,T Types 0.08-0.12 0.15-0.20 0.23-0.30 0.26-0.36	-200	>-300 S,R,B Types 0.25-	-200~ Outer \$ mm) K,N Types SS304 SS310 SS310 INCL60	Sheath(m	E,J,T Types SS30, SS32, SS31	±0.	5 deg Dia.(S,R Types INCL60 iNCL80	NI NI	Types ICL60, ICL80
NiCr-CuN Fe- Constant Cu-CuNi Outer Shi Outer Shi Dia 0.5 1.0 1.5 1.0 1.5 2.0	an eath(mm) Wall Thickness 0.05-0.10 0.10-0.20 0.15-0.25 0.16-0.26 0.25-0.35	J		1 2 1 core wire D K,N,E,J,T Types 0.08-0.12 0.15-0.20 0.23-0.30 0.26-0.36 0.40-0.50	-200	>	-200~ Outer \$ mm) K,N Types SS304 SS310 SS310 INCL60	Sheath(m	E,J,T Types SS30, SS32, SS31	±0.	5 deg Dia.(S,R Types INCL60 iNCL80	NI NI	Types ICL60, ICL80
NiCr-CuN Fe- Constant Cu-CuNi Outer Shi Outer Shi 0.5 1.0 1.5 1.6 2.0 3.0 3.2	an eath(mm) Wall Thickness 0.05-0.10 0.10-0.20 0.15-0.25 0.16-0.26 0.25-0.35 0.38-0.48 0.48-0.58	J		1 2 1 Core wire D K,N,E,J,T Types 0.08-0.12 0.15-0.20 0.23-0.30 0.26-0.36 0.40-0.50 0.40-0.50 0.50-0.60	-200	S,R,B Types 0.25 .030 0.40 0.30- 0.40	-200~ Outer \$ mm) K,N Types SS304 SS310 SS310 INCL60	Sheath(m	E,J,T Types SS30, SS32, SS31	±0.	5 deg Dia.(S,R Types INCL60 iNCL80	NI NI	Types ICL60, ICL80
NiCr-CuN Fe- Constant Cu-CuNi Outer Shi Outer Shi Dia 0.5 1.0 1.5 1.0 1.5 1.6 2.0 3.0	an eath(mm) Wall Thickness 0.05-0.10 0.10-0.20 0.15-0.25 0.16-0.26 0.25-0.35 0.38-0.48	J		1 2 1 core wire D K,N,E,J,T Types 0.08-0.12 0.15-0.20 0.23-0.30 0.26-0.36 0.40-0.50 0.50-0.60	-200	>	-200~ Outer \$ mm) K,N Types SS304 SS310 SS310 INCL60	Sheath(m	E,J,T Types SS30, SS32, SS31	±0.	5 deg Dia.(S,R Types INCL60 iNCL80	NI NI	Types ICL60, ICL80

		Insul	Metal Over ation - Magnesiun			
and the second						
2.7	1.75-1.90	1.95-2.05				
3.0	1.30-1.44	1.30-1.40	0.45- 0.50			
6.4	105-1.15	1.02-1.12	0.50 0.45- 0.50			
5.0	0.78-0.88	0.80-0.90	0.40- 0.45 0.45-			








Product Comparison

The quality of our products has been strictly tested and guaranteed

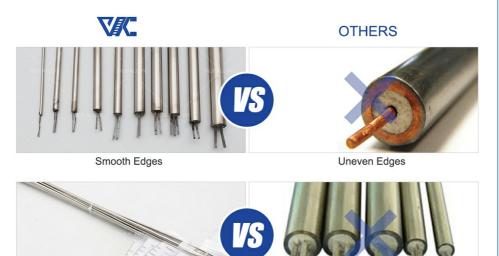

Product Quality Strict Inspection

Product Quality Is Not Up To Standard



MI thermocouple cables, also known as mineral-insulated thermocouple cables, find applications in various industries that require accurate temperature measurement. Some common areas of application for MI thermocouple cables include:

1. Industrial Processes: MI thermocouple cables are widely used in industrial processes such as oil and gas, chemical processing, power generation, and metal refining. They enable precise temperature monitoring and control in these environments.

2. Furnaces and Kilns: MI thermocouple cables are employed in high-temperature applications like furnaces, kilns, and incinerators. They can withstand extreme temperatures and provide reliable temperature measurements in harsh conditions.

3. Aerospace and Aviation: MI thermocouple cables are utilized in the aerospace and aviation industries for temperature monitoring in aircraft engines, gas turbines, and rocket propulsion systems. They play a crucial role in ensuring safe and efficient operation.

4. Research and Development: MI thermocouple cables are used in scientific research laboratories and development facilities for accurate temperature measurement in experiments, testing, and prototype development.

5. Automotive Industry: MI thermocouple cables are employed in the automotive sector for temperature monitoring in engines, exhaust systems, and other critical components. They help optimize performance, fuel efficiency, and emissions control.

6. Food Processing: MI thermocouple cables are utilized in food processing applications to monitor and control temperatures in ovens, boilers, and other cooking or cooling processes. They contribute to ensuring food safety and quality.

7. Pharmaceutical and Biotechnology: MI thermocouple cables find application in pharmaceutical and biotechnology industries for temperature monitoring in drug manufacturing, fermentation processes, and sterilization equipment.

These are just a few examples of the application areas for MI thermocouple cables. Their versatility, accuracy, and durability make them suitable for a wide range of industries where precise temperature monitoring is essential.





Over the past 18 years, we have focused on the resistance alloy business and continuously innovated and explored, ultimately developing new nickel-based alloy products such as chromium-nickel-iron alloy, Monel alloy, Hastelloy alloy, high-temperature alloy, and more.



