

BLX

## China Corrosion Resisting Incoloy Alloy 800H/825/925 Bar In Stock

for more products please visit us on victory-alloy.com

Basic Information	
• Place of Origin:	China
• Brand Name:	Victory
Certification:	ISO9001,ROHS
<ul> <li>Model Number:</li> </ul>	Incoloy 800,800H,800HT,825,925
Minimum Order Quantity:	5 Kg
Price:	50 - 499 kilograms \$36.00
<ul> <li>Packaging Details:</li> </ul>	Incoloy bar is packed into wooden cases. Special packaging requirements can also be accommodated. OEM is also acceptable
Delivery Time:	7-20 Days
<ul> <li>Payment Terms:</li> </ul>	L/C, T/T, Western Union, MoneyGram

• Supply Ability: 300 tons per month

# 

6 15

## Product Specification

Product Name: Material:	Nickel Alloy Round Bar Iron Nickel Material	V
Ni (Min):	72%	
Resistance (μΩ.m):	1.15	
Ultimate Strength (≥ MPa):	965	
Elongation ( $\geq$ %):	30	
Density:	8.2 G/cm3	
Powder Or Not:	Not Powder	
Sureface:	Bright,Oxided	
Application:	Construction, Industry	
Size:	Customized Size	
Service:	OEM\ODM	
Highlight:	Corrosion Resisting Incoloy Alloy 800H, Incoloy Alloy 925 Bar	

### More Images



**Product Description** 

Our Product Introdu

Contact Person : Steven WhatsApp : +8618961220953 E-mail: victory@dlx-alloy.com





# **INCOLOY BAR**

Incoloy 800,800H,800HT,825,925

Customized service available

#### Nickel Alloy Incoloy 800h Bar

Incoloy 800HT has excellent resistance in chemicals containing sulfuric acid, and has good resistance to environments containing chlorides, phosphoric acid and nitric acid. It contains niobium for stabilization against sensitization and resultant intergranular corrosion. It also has good mechanical properties and fabricability.

Incoloy800H is a kind of austenitic heat-resistant alloy which is widely used in high-pressure structures at high temperature. The high strength of 800H alloy is mainly due to the addition of carbon, aluminum and titanium, and annealing at the lowest temperature of 1149 ° c to reach the grain size of ASTM5 or coarser. It has excellent corrosion resistance, stress corrosion resistance and processability in extremely high temperature water-based media up to 500 °C.

800	800H	800HT	825	92
≤0.1	0.05-0.1	0.06-0.1	≤0.05	≤0
≤1.5	≤1.5	≤1.5	≤1	≤
rest	rest	rest	rest	re
			≤0.02	≤0
≤0.015	≤0.015	≤0.015	≤0.03	≤0
≤1	≤1	≤1	≤0.5	≤(
≤0.75	≤0.75	≤0.75	1.5-3	1.{
30-35	30-35	30-35	38-46	42
0.15-0.6	0.15-0.6	0.15-0.6	0.2-1	0.15
0.15-0.6	0.15-0.6	0.15-0.6	0.6-1.2	1.9
19-23	19-23	19-23	19.5-23.5	19.5
			2.5-3.5	2.5
	≤0.1 ≤1.5 rest  ≤0.015 ≤1 ≤0.75 30-35 0.15-0.6 0.15-0.6 19-23	$\leq 0.1$ $0.05 \cdot 0.1$ $\leq 1.5$ $\leq 1.5$ rest       rest $\leq 0.015$ $\leq 0.015$ $\leq 1$ $\leq 1$ $\leq 0.75$ $\leq 0.75$ $30 \cdot 35$ $30 \cdot 35$ $0.15 \cdot 0.6$ $0.15 \cdot 0.6$ $0.15 \cdot 0.6$ $0.15 \cdot 0.6$ $19 \cdot 23$ $19 \cdot 23$	$\leq 0.1$ $0.05 \cdot 0.1$ $0.06 \cdot 0.1$ $\leq 1.5$ $\leq 1.5$ $\leq 1.5$ rest         rest         rest $\leq 0.015$ $\leq 0.015$ $\leq 0.015$ $\leq 1$ $\leq 1$ $\leq 1$ $\leq 0.75$ $\leq 0.75$ $\leq 0.75$ $30 \cdot 35$ $30 \cdot 35$ $30 \cdot 35$ $0.15 \cdot 0.6$ $19 \cdot 23$ $19 \cdot 23$ $19 \cdot 23$	$\leq 0.1$ $0.05 \cdot 0.1$ $0.06 \cdot 0.1$ $\leq 0.05$ $\leq 1.5$ $\leq 1.5$ $\leq 1.5$ $\leq 1$ restrestrestrest $\sim$ $\sim$ $\sim$ $\leq 0.02$ $\leq 0.015$ $\leq 0.015$ $\leq 0.03$ $\leq 1$ $\leq 1$ $\leq 1$ $\leq 0.03$ $\leq 1$ $\leq 1$ $\leq 1$ $\leq 0.5$ $\leq 0.75$ $\leq 0.75$ $\leq 0.75$ $1.5 \cdot 3$ $30 \cdot 35$ $30 \cdot 35$ $30 \cdot 35$ $38 \cdot 46$ $0.15 \cdot 0.6$ $0.15 \cdot 0.6$ $0.15 \cdot 0.6$ $0.6 \cdot 1.2$ $19 \cdot 23$ $19 \cdot 23$ $19 \cdot 23 \cdot 5$ $19 \cdot 52 \cdot 5 \cdot 5$

# **Product Details**

igh-quality materials and surface treatment technology















# **Product Comparison**

The quality of our products has been strictly tested and guaranteed

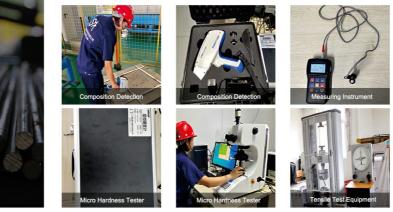

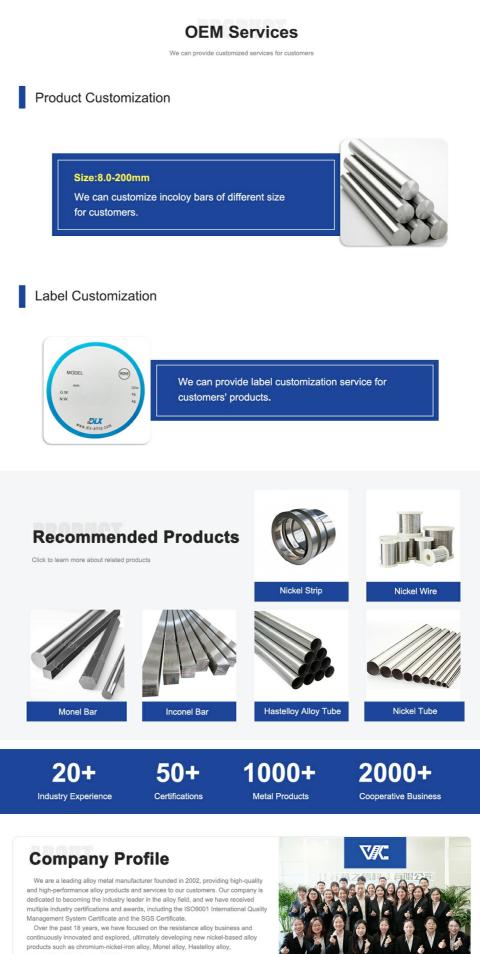

high-temperature alloy, and more.

