

18650 Lithium Battery Nickel Tape 2P-8P 18650 Nickle Strip Battery Spot Welding Raw Materials Pure Nickel Strip

for more products please visit us on victory-alloy.com

Basic Information	
• Place of Origin:	China
 Brand Name: 	Victory
Certification:	ISO,TUV, RoHS
 Model Number: 	N4,N6,Ni200,Ni201
Minimum Order Quantity:	2kg
Price:	\$28-\$32/kg
 Packaging Details: 	Spool package with Carton box, Coil package with polybag,
 Delivery Time: 	5-21 days
 Payment Terms: 	L/C, T/T, Western Union, MoneyGram

- Supply Ability: 300 to
 - 300 tons per month



Product Specification

 Product Name: 	Pure Nickel Strip
Grade:	N4,N6,Ni200,Ni201
• Metal:	Nickel
• Ni(min):	99.95%
 Resistance (μΩ.m): 	1.5
• Ultimate Strength (≥ MPa):	462
 Elongation (≥ %): 	45
• Surface:	Bright
 Density (g/cm3): 	8.9 G/cm3
 Resistivity: 	1.35±0.07
 Melting Point(°C): 	1435-1446 °C
 Application: 	Chemical Industry
• M.O.Q:	2KG
Highlight:	18650 Lithium Battery Nickel Tape, 8P 18650 Nickle Strip

More Images



Product Description

The grades of the ure Nickel Strip usually include N4 and N6, both of which are made of high-purity nickel materials to ensure the stability of material quality and performance. The main characteristics of this material are its excellent corrosion resistance, excellent conductivity, and good plasticity. Pure Nickel Strip is a multifunctional metal strip with excellent corrosion resistance, excellent conductivity, and good plasticity. It plays an important role in multiple fields, providing reliability, stability, and performance advantages for various applications. Whether in the fields of chemical, electronics, energy, or automobiles, Pure Nickel Strip is an indispensable material choice.

Specification


Grade	Ni+Co	Cu	Si	Mn	С	Mg	S	Р
N4	99.8	0.015	0.03	0.002	0.01	0.01	0.001	0.00 1

0

N6	99.6	0.10		0.10		0.05	0.10		0.10	0.00)5	0.00 2
Ni201	≥99.0	≤0.25		≤0.35		≤0.35	≤0.02	. ,	/	≤0.0)1	/
Ni200	≥99.2	≤0.25		≤0.35		≤0.35	≤0.15	,	/	≤0.0	1	/
Material		18650/2170	0/26650/32	650 nick	el strin						\vdash	
Dimension		1P to 9P			h						-	
Available Space		18.5mm,19mm, 19.5mm,			ım							
Usage		Use for 186	50 battery p	ack								
Package		Nickel strip in roll pack int			on							
Physical properties		High temperature resistar			rosion re	esistance,						
Technical support		With imported stamping m 2000 sets of battery indus										
Functions						age battery, ne and other ener			lectric			
Advantage		All materials that the proc			l adopt t	he dry -punchi	ng technolo	ogy to ensu	ire			
l shape nickel s	strip: 1P, 2	P 3P, 4P, 5	P, 6P, 7P	, 8P, 9I	P							
		of two weldir rs: 18.5mm	Dista	ince of t	two	istance of two	wolding	Distance -	ftwo	olding		
1odel Thickness		rs: 18.5mm r battery pac	K	ng cent 19mm	ers:	centers: 19	-	centers: 2				
		attery space	r)			W/: dth /			th/mm)			
1P	Wic	dth(mm) 8	WI	dth(mm 8	0	Width(m 8	111)	WID	th(mm) 8			
2P	2	5.5/27	2	6.5/27		26.5/2	7		27			
3P 4P		44 62.5		46 65.5		46			47 67			
5P 0.15/0.2mm		81		85		85			87			
6P		99.5		104.5		104.5			107			
7P 8P		118 136.5		124 143.5		124 143.5			127 147			
9P		155		163	143.5 147 163 167							
H shape nickel	- Autom											
		1										
Model 1P	Strip Thickness		Width 8			Distance (of two wel	ding cente	ers			
Model 1P 2P	Thickness		8 23		-	Distance o	1005010		ers			
Model 1P 2P			8		-	Distance o	of two weld 18.5mm		ers			
Model 1P 2P 3P	Thickness		8 23 39		-	Distance o	1005010		ers			
Model 1P 2P 3P 4P	Thickness		8 23 39 55			• • •	18.5mm Nickel			hatter		
Model 1P 2P 3P 4P	Thickness		8 23 39 55 71	Ceil spacin	Width	Dimension of the Square	18.5mm		Type of	battery sck		
Model 1P 2P 3P 4P 5P	Thickness	n	8 23 39 55 71		Width	Dimension of	18.5mm Nickel Plated steel strip	Fure	Type of			
Model 1P 2P 3P 4P 5P	Thickness	Dimension (r	8 23 39 55 71 	spacin g(mm) 18.4		Dimension of the Square hole (nm)	Nickel Plated steel strip Length for 128.3	Fure Nickel per Kg(m) 112.6	Type of pa with holder	without		
Model 1P 2P 3P 4P 5P Type	Thickness	n Dimension (r	8 23 39 55 71 	spacin g(nn)		Dimension of the Square hole (mm)	Nickel Plated steel strip Length for	Fure Nickel per Kg(m)	Type of pa	without holder		
Model 1P 2P 3P 4P 5P Type	ip	Dimension (r 0.15*7*18. 0.15*7*19. 0.15*7*20.	8 23 39 55 71 mm) 4 5 25	spacin g(mm) 18.4 19 19.5 20.25	7	Dimension of the Square hole (nm) - - - -	18.5mm Nickel Plated stel stel 128.3 127.9 127.6	Pure Nickel per Kg(n) 112.6 112.1 111.9	Type of pe with holder √ √	without holder		
Model 1P 2P 3P 4P 5P Type 1P 18650 Nickel str	15/0.2mr	Dimension (r 0.15*7*18. 0.15*7*19.	8 23 39 55 71 mm) 4 5 25 *13.5)	spacin g(mm) 18.4 19 19.5	7	Dimension of the Square hole (nm) - -	Nickel Plated strip Length for 128.3 127.9	Pure Nickel per Kg(m) 112.6 112.1	Type of pe with holder	without holder		
Model 1P 2P 3P 4P 5P Type 1P 18650 Nickel str	115/0.2mr	Dimension (r 0.15*7*18. 0.15*7*19. 0.15*7*19. 0.15*7*20. 15*26*19(13.5 15*27*19.5(12)	8 23 39 55 71 mm) 4 4 5 25 **13.5) **14.5) .5*12.5)	spacin s(nn) 18.4 19 19.5 20.25 19 19.5 19.5 19.75	7 26 27	Dimension of the Square hole (nm) - - - 12*12 12*14.5 12.5*12.5	18.5mm Nickel Plated steel strip Length for 128.3 127.9 127.6 47.2 48.9 47	Fure Nickel per Kg(m) 112.6 112.1 111.9 41.4 42.9 41.2	Type of pa with holder J J J J J J J	without holder		
Model 1P 2P 3P 4P 5P Type 1P 18650 Nickel str 2P 18650 Nickel str 2P 18650 Nickel str	ip 0.15/0.2mr 0.15/0.2mr 0.15 0.15 0.15 0.15	Dimension (r 0.15*7*18. 0.15*7*19. 0.15*7*19. 0.15*7*20. 15*26*19(13.5 15*26*19(13.5)	8 23 39 55 71 mm) 4 4 5 5 5 5 **13.5) **14.5) .5*13.5)	spacin s(nn) 18.4 19 19.5 20.25 19 19.5	7 26 27	Dimension of the Square hole (mm) - - - 12*12 12*14.5	Nickel Plated stell strip 128.3 127.9 127.6 47.2 48.9	Fure Nickel per Kg(m) 112.6 112.1 111.9 41.4 42.9	Type of pa with holder	without holder		
Model 1P 2P 3P 4P 5P Type 1P 18650 Nickel str 2P 18650 Nickel str Dislocation 2P 1865 Nickel strip	ip 0.15/0.2mr 0.15/0.2mr 0.15/0.2mr 0.15/0.2mr 0.15/0.2mr 0.15/0.2mr	Dimension (r 0.15*7*18. 0.15*7*19. 0.15*7*19. 0.15*7*20. 15*26*19(13.5 15*27*19.5(12) \$*27*19.5(12)	8 23 39 55 71 mm) 4 4 5 25 **13.5) **14.5) 5*12.5) 5*13.5) 1*12.5)	spacin g(mn) 18.4 19 19.5 20.25 19 19.5 19.75 20.25	7 26 27	Dimension of the Square hole (mm) - - 12*12 12*14.5 12.5*12.5 13.5*13.5	18.5mm Nickel Flated steel strip Length for 128.3 127.9 127.6 47.2 48.9 47 48.9	Fure Nickel per Kg(m) 112.6 112.1 111.9 41.4 42.9 41.2 42.9	Type of pa with holder J J J J J J J	without holder ✓		
Model 1P 2P 3P 4P 5P Type 1P 18650 Nickel str 2P 18650 Nickel str 2P 18650 Nickel str Dislocation 2P 18650	Thickness 0.15/0.2mr ip 0.15/0.15/0.2mr ip 0.15/0.2mr ip 0.15/0.2mr ip 0.15/0.2mr ip 0.15 0.15 0.15 0.15 0.15 ip 0.15 i0 0.15	Dimension (r 0.15*7*18. 0.15*7*19 0.15*7*19 0.15*7*19. 0.15*7*19.5(12 %27*19.75(12) %27*19.75(12) %27*19.5(12) %27*20.25(13) 5*27*19.5(12) 5*25.5*18.4(1) 15*25.5*18.4(1)	8 23 39 55 71 mm) 4 5 5 25 *11.5) *14.5) 5*12.5) .5*13.5) 1*12.5) 8*9.5) 8*9.5)	spacin g(m) 18.4 19 19.5 20.25 19 19.5 20.25 19.75 20.25 18.4 18.4 18.4 19.5	7 26 27 25. 5	Dimension of the Square hole (mm) - - 12*12 12*14.5 12.5*12.5 13.5*13.5 11*12.5 8*9.5 8*9.5	18.5mm Nickel Plated steel steel 128.3 127.9 127.6 47.2 48.9 47.4 48.9 47.9 48.9 41.1 38.6	Pure Nickel per Eg(m) 112.6 112.1 111.9 41.4 42.9 41.2 42.9 41.2 42.9 36.1 33.8	Type of pa with holder J J J J J J J	vithout holder 		
Model 1P 2P 3P 4P 5P Type 1P 18650 Nickel str 2P 18650 Nickel str 2P 18650 Nickel str Dislocation 2P 186 Nickel strip	ip 0.15/0.2mr 0.15/0.2mr 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15	Dimension (r 0.15*7*18. 0.15*7*19. 0.15*7*19. 0.15*7*19. 0.15*7*19. 15*26*19(13.5 15*27*19.75(12) \$*27*19.75(12) \$*27*20.25(13) 5*25.5*18.4 (11) 15*25.5*18.4 (11)	8 23 39 55 71 mm) 4 4 5 5 25 *13.5) *14.5) 5*12.5) 5*12.5) 5*13.5) 1*12.5) 8*9.5) 1*12.5)	spacin g(m) 18.4 19 19.5 20.25 19 19.5 20.25 19.75 20.25 18.4 18.4 18.4 19.5	7 26 27	Dimension of the Square hole (mm) - - 12*12 12*14.5 12.5*12.5 13.5*13.5 11:*12.5 8*9.5 8*9.5	18.5mm Nickel Flated steel steel 128.3 127.9 127.6 47.2 48.9 47. 48.9 47. 48.9 41.1	Pure Nickel per Kg(m) 112.6 112.1 111.9 41.4 42.9 41.2 42.9 42.9 36.1	Type of pe with holder 	without holder /		
Model 1P 2P 3P 4P 5P Type 1P 18650 Nickel str 2P 18650 Nickel str 2P 18650 Nickel str Dislocation 2P 186 Nickel strip Dislocation 2P 1865 Nickel strip	Thickness 0.15/0.2mr ip ip 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15	Dimension (r 0.15*7*18. 0.15*7*19. 0.15*7*19. 0.15*7*20. 15*26*19(13.5 5*27*19.5(12 5*27*19.5(12 5*27*20.25(13) 5*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*19.5(1) 15*25.5*19.5(1)	8 23 39 55 71 mm) 4 4 5 25 *13.5) *14.5) 5*12.5) 5*12.5) 1*12.5) 8*9.5) 1*12.5) 8*9.5) 1*12.55 *12.55 *12.55 *12.55 *12.55 *12.55 *12.55 *12.55 *12.55 *12.55 *13.55 *13.55 *13.55 *13.55 *13.55 *13.55 *14.55 *15.55	spacin (mm) 18.4 19 19.5 20.25 19 19.5 19.75 20.25 19.75 20.25 19.5 19.75 20.25 19.5 18.4 19.5 18.4 18.4 19.5 18.4 18.4 19.5 18.4 19.5 18.4 18.4 19.5 19.5 18.4 19.5 19.5 19.5 18.5 19.5 1	7 26 27 25.5 44.5 45 47.5	Dimension of the Square hole (mm) - - 12*12 12.5*12.5 13.5*13.5 11*12.5 8*9.5 8*9.5 11*12.5 12*12 12.65*12.65	18.5mm Nickel Plated steel strip 128.3 127.9 127.6 47.2 48.9 47 48.9 47 48.9 41.1 38.6 27.4 29.1 27.4	Fure Nickel per Eg(m) 112.6 112.1 111.9 41.4 42.9 41.2 42.9 41.2 42.9 36.1 33.8 24 25.5 24	Type of ps with holder J J J J J J J J J J J J J J J J J J J	vithout holder 		
Model 1P 2P 3P 4P 5P Type 1P 18650 Nickel str 2P 18650 Nickel str 2P 18650 Nickel str Dislocation 2P 186 Nickel strip Dislocation 2P 1865 Nickel strip	Thickness 0.15/0.2mr ip 0.15/0.2mr ip 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15*47 0.15*47	Dimension (r 0.15*7*18. 0.15*7*19. 0.15*7*19. 0.15*7*19. 0.15*7*19. 5(12) \$*27*19.75(12) \$*27*19.75(12) \$*27*20.25(13) 5*25.5*18.4(115*25.5*18.4(115*25.5*18.4(115*25.5*19.5) (15*25.5*18.4(115*25.5*19.5))	8 23 39 55 71 mm) 4 5 25 *13.5) *14.5) 5*12.5) 5*12.5) 8*9.5) 1*12.5) 8*9.5) 1*12.5) 8*9.5) 1*12.5) 8*9.5)	spacin s(m) 18.4 19 19.5 20.25 19.5 20.25 19.75 20.25 18.4 18.4 19.5 18.4 19.5	7 26 27 25.5 44.5 45 47.5	Dimension of the Square hole (mm) - - 12*12 12*14 5 12.5*12 5 13.5*13.5 11*12.5 8*9.5 8*9.5 11*12.5 12*12	18.5mm Nickel Plated steel strip 128.3 127.9 127.6 47.2 48.9 47. 48.9 47. 48.9 41.1 38.6 27.4 29.1	Fure Nickel per Kg(m) 112.6 112.1 111.9 41.4 42.9 41.2 42.9 41.2 42.9 36.1 33.8 24 25.5	Type of pa with holder J J J J J J J J J J	vithout holder 		
Model 1P 2P 3P 4P 5P Type 1P 18650 Nickel str 2P 18650 Nickel str Dislocation 2P 186: Nickel strip Dislocation 2P 186: Nickel strip 3P 18650 Nickel str	Thickness 0.15/0.2mr ip 0.15/0.2mr 0.15/0.2mr 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15	Dimension (r 0.15*7*18. 0.15*7*19 0.15*7*19 0.15*7*19. 0.15*7*19. 0.15*7*19. 15*26*19(13.5 15*27*19.5(12 5*27*19.5(12 5*27*19.5(12 5*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.5) 115*25.5*18.4(1 15*25.5*18.5) 115*25.5*18.4(1 15*25.5*18.5) 115*25.5*19.12 15*20.25(1 15*20.25(1) 15*64*19(12)	8 23 39 55 71 am) 4 5 5 25 *13.5) *14.5) 5*12.5) 5*12.5) 8*9.5) 1*12.5) 8*9.5) 1*12.5) *12.5) *14.5) 5*13.5) 1*12.5) *14.5) 5*13.5) 1*12.5) *14.5) *15	spacin s(mn) 18.4 19 19.5 20.25 19 19.5 20.25 19.75 20.25 18.4 18.4 19.5 18.4 19.5 18.4 19 20.15 20.25 18.5 19	7 26 27 25.5 44.5 45 47.5 63 64	Dimension of the Square hole (m) - - - 12*12 12*14.5 12.5*12.5 13.5*13.5 11:*12.5 8*9.5 8*9.5 8*9.5 11:*12.5 12*12 12.65*12.65 13.5*13.5 11:*12.5 12:*12 5 12:*12.5	18.5mm Nickel Plated steel steel steel 128.3 127.9 127.6 47.2 48.9 47.4 48.9 41.1 38.6 27.4 29.1 27.4 29.1 27.4 29.1 27.4 29.1 27.4 29.1 27.4 29.1 21.4 29.1 21.4	Pure Nickel per Eg (m) 112.6 112.1 111.9 41.4 42.9 41.2 42.9 41.2 42.9 36.1 33.8 24 25.5 24 25.7 18.9 18.4	Type of pe with holder J	xck holder		
Model 1P 2P 3P 4P 5P Type 1P 18650 Nickel str 2P 18650 Nickel str 2P 18650 Nickel str Dislocation 2P 1861 Nickel strip Dislocation 2P 1865 Nickel strip 3P 18650 Nickel str	Thickness 0.15/0.2mr 0.15/0.2mr 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15	Dimension (r 0.15*7*18. 0.15*7*19 0.15*7*19 0.15*7*19. 0.15*7*19. 0.15*7*19. 15*26*19(13.5 15*27*19.5(12 5*27*19.5(12 5*27*19.5(12 5*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.5) 115*25.5*18.4(1 15*25.5*18.5) 115*25.5*18.4(1 15*25.5*18.5) 115*25.5*19.12 15*20.25(1 15*20.25(1) 15*64*19(12)	8 23 39 55 71 4 5 5 25 *13.5) *14.5) 5*12.5) 5*12.5) 8*9.5) 1*12.5) *12.5 *12.65 1*12.5) *12.5 *12.65 *13.5 *12.5 *12.65	spacin s(mn) 18.4 19 19.5 20.25 19 19.5 20.25 19.75 20.25 18.4 18.4 19.5 18.4 19.5 18.4 19 20.15 20.25 18.5 19	7 26 27 25.5 44.5 45 47.5 63 64 67.95	Dimension of the Square hole (m) - - 12*12 12*14.5 12.5*12.5 13.5*13.5 11*12.5 8*9.5 8*9.5 11*12.5 12*12 12.65*12.65 13.5*13.5 11*12.5	18.5mm Nickel Plated stel stel stel 128.3 127.9 127.6 47.2 48.9 47.2 48.9 48.9 48.9 41.1 38.6 27.4 29.4 27.4 29.4 21.6	Pure Nickel per Eg(n) 112.6 112.1 111.9 41.4 42.9 41.2 42.9 42.9 42.9 36.1 33.8 24 25.7 18.9	Type of ps with holder J	xck holder		
Model 1P 2P 3P 4P 5P Type 1P 18650 Nickel str 2P 18650 Nickel str 2P 18650 Nickel str Dislocation 2P 1865 Nickel strip Dislocation 2P 1865 Nickel strip 3P 18650 Nickel str 4P 18650 Nickel str	Thickness 0.15/0.2mr ip 0.15/0.2mr ip 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15	Dimension (r 0.15*7*18. 0.15*7*19. 0.15*7*19. 0.15*7*20. 15*26*19(13.25) 5*27*19.5(12) 5*27*19.5(12) 5*27*20.25(13) 5*25.5*18.4(115*25.5*18.4(115*25.5*18.4(115*25.5*18.4(115*25.5*18.4(115*25.5*19.5(12) 7.5*20.15(12) 7.5*20.25(1) 15*64*19(12) 95*20.15(12) 7.7*20.25(1) 15*63*19(12)	8 23 39 55 71 mm) 4 4 5 25 *13.5) *14.5) 5*12.5) 5*12.5) 5*12.5) 8*9.5) 1*12.5) 8*9.5) 1*12.5) *142.5) *12.5]	spacin s(mm) 18.4 19 19.5 20.25 19 19.5 20.25 19.75 20.25 18.4 18.4 19.5 18.4 19.5 18.4 19.5 20.25 18.4 19.5 20.25 18.5 19 20.15 20.25 19	7 26 27 25.5 44.5 45 47.5 63 64 67.95 67 83	Dimension of the Square hole (mm) - - - 12*12 12.5*12.5 13.5*13.5 11*12.5 8*9.5 11*12.5 12.5*12.65 13.5*13.5 11*12.5 12*12 12.65*12.65 13.5*13.5 11*12.5 12*12	Nickel Flated stel 28.3 127.6 47.2 48.9 47.4 48.9 48.9 41.1 38.6 27.4 29.1 27.4 29.1 27.4 29.4 21.6 21.3 16.4	Pure Nickel per Eg(n) 112.6 112.1 111.9 41.4 42.9 41.2 42.9 42.9 36.1 33.8 24 25.5 24 25.5 24 25.7 18.9 18.4 17.2 18.7 14.4	Type of ps with holder J	xck holder		
Model 1P 2P 3P 4P 5P Type 1P 18650 Nickel str 2P 18650 Nickel str Dislocation 2P 1865 Nickel strip Dislocation 2P 1865 Nickel strip 3P 18650 Nickel str	Thickness 0.15/0.2mr	Dimension (r 0.15*7*18. 0.15*7*19. 0.15*7*19. 0.15*7*19. 0.15*7*9. 0.15*7*9. 0.15*7*9. 0.15*7*19. 0.15*7*19. 0.15*7*19. 0.15*7*20. 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1 15*25.5*18.4(1) 15*45*19.(12 15*45*19.(12 15*45*19.(12 15*64*19.(12 15*64*19.(12 15*64*19.(12 15*83*19.(12) 15*83*19.(12) 15*83*19.(12) 15*83*19.(12) 15*83*19.(12) 15*83*19.(12) 15*83*19.(12) 15*83*19.(12) 15*83*19.(12) 15*83*19.(12) 15*83*19.(12) 15*83*19.(12) 15*83*19.(12) 15*83*19.(12) 15*13*13.(1	8 23 39 55 71 am) 4 5 5 25 *14.5) *14.5) 5*12.5) 5*12.5) 1*12.5) 8*9.5) 1*12.5) 8*9.5) 1*12.5) 8*9.5) 1*12.5) *12.5) 8*9.5) 1*12.5) 8*9.5) 1*12.5) *12.5) *12.5) *13.5) 1*12.5) *14.5) 5.5 *13.5) *14.5) 5.5 *13.5) *14.5) 5.5 *14.5) 5.5 *15.5) *14.5) 5.5 *15.5) *15.5]	spacin s(mm) 18. 4 19 19. 5 20. 25 19 19. 5 20. 25 19. 7 20. 25 18. 4 18. 4 19. 5 20. 25 18. 4 19. 5 20. 25 19. 5 20. 25 19. 5 20. 25 19. 5 20. 25 19. 5 20. 25 18. 4 19. 5 20. 25 18. 4 18. 4 19. 5 20. 25 18. 4 19. 5 20. 25 18. 4 19. 5 20. 25 18. 4 19. 5 20. 25 20. 25	7 26 27 25.5 44.5 45 47.5 63 64 67.95 63 64 83 88.1 87.9	Dimension of the Square hole (m) - - - 12*12 12*14.5 12.5*12.5 13.5*13.5 11*12.5 8*9.5 8*9.5 11*12.5 12*12 12.65*12.65 13.5*13.5 11*12.5 12*12 12.65*12.65 13.5*13.5	18.5mm Nickel Plated stel stel stel 128.3 127.9 127.6 47.2 48.9 47.2 48.9 48.9 48.9 48.9 41.1 38.6 27.4 29.4 21.6 27.4 29.4 21.6 21.4 29.4 21.6 21.4 29.4 21.6 21.4 29.4 21.6 21.7 127.5 21.7 21	Pure Nickel per Eg (n) 112. 6 112. 1 111. 9 41. 4 42. 9 41. 2 42. 9 42. 9 42. 9 42. 9 36. 1 33. 8 24 25. 7 18. 9 18. 4 17. 2 18. 7 18. 4 17. 2 18. 4 17. 2 18. 4 17. 2 18. 4 17. 3 14. 6	Type of ps with holder J	xck holder		
Model 1P 2P 3P 4P 5P Type 1P 18650 Nickel str 2P 18650 Nickel str 2P 18650 Nickel str Dislocation 2P 1861 Nickel strip Dislocation 2P 1865 Nickel strip 3P 18650 Nickel str 4P 18650 Nickel str	Thickness 0.15/0.2mr 0.15/0.2mr 0.15/0.2mr 0.15 0.15 0.15 0.15 0.15 0.15 0.15 0.15	Dimension (r 0.15*7*18. 0.15*7*19. 0.15*7*19. 0.15*7*20. 15*26*19(13.5 15*27*19.5(12) **27*19.5(12) **27*19.5(12) **27*20.25(13) 5*25.5*18.4(11) 15*25.5*18.4(11) 15*25.5*18.4(11) 15*25.5*18.4(11) 15*425.5*19.5(12) .5*20.15(12) .5*20.15(12) .5*20.15(12) .5*20.15(12) .5*23.15(12) .1*20.15(12) .1*20.15(12) .1*20.15(12)	8 23 39 55 71 71 4 5 5 25 *13.5) *14.5) 5*12.5) 8*9.5) 8*9.5) 1*12.5) 8*9.5) 1*12.5) *122 65*12.65) 1*12.5) *121 65*12.65) 1*12.5) *121 65*13.5) *121 65*13.5) *121 55 *122 55 *122 55 *122 55 *125 *12	spacin s(mn) 18. 4 19 19. 5 20. 25 19 19. 5 20. 25 18. 4 18. 4 19. 5 20. 25 18. 4 19. 5 18. 4 19. 5 18. 4 19. 5 20. 25 18. 4 19 20. 15 20. 25 19 20. 15 20. 25 19 20. 15 20. 25 19	7 26 27 25.5 44.5 45 47.5 63 64 67.95 67 83 88.1 87.9 102	Dimension of the Square hole (am) - - - 12*12 12*14.5 12.5*12.5 13.5*13.5 11*12.5 8*9.5 11*12.5 12*12 12.65*12.65 13.5*13.5 11*12.5 12*12 12.65*12.65 13.5*13.5 12*12 12.65*12.65 13.5*13.5 12*12	18.5mm Nickel Plated steel steel 28.3 127.9 127.6 47.2 48.9 47.4 48.9 47.4 48.9 41.1 38.6 27.4 29.1 27.4 29.1 27.4 29.1 27.4 29.1 127.6 21.3 16.7 13.5	Pure Nickel per Eg (m) 112.6 112.1 111.9 41.4 42.9 41.2 42.9 36.1 33.8 24 25.5 24 25.7 18.9 18.4 17.2 18.7 14.7 14.4 17.3 14.6 11.9	Type of pe with holder J	xck holder		
Model 1P 2P 3P 4P 5P Type 1P 18650 Nickel str 2P 18650 Nickel str Dislocation 2P 1861 Nickel strip Dislocation 2P 1861 Nickel strip 3P 18650 Nickel str 4P 18650 Nickel str 5P 18650 Nickel str	Thickness 0.15/0.2mr 0.15/0.2mr 0.15/0.2mr 0.15/0.2mr 0.15 0	Dimension (n 0.15*7*18. 0.15*7*19. 0.15*7*19. 0.15*7*19. 0.15*7*19. 0.15*7*20. 15*26*19(13.5 15*27*19.75(12. 5*27.52.5*18.4(1) 15*25.5*18.4(1) 15*25.5*18.4(1) 15*25.5*18.4(1) 15*25.5*18.4(1) 15*25.5*18.4(1) 15*25.5*18.4(1) 15*25.5*18.4(1) 15*25.5*18.5(1) 15*45*19(12) 15*20.15(12) 1.5*20.15(12) 1.5*64*19(12) 1.5*83*19(12) 1.15*64*19(12) 1.15*64*19(12) 1.15*64*19(12) 1.15*64*19(12) 1.15*102*19(1) 0.15*108.25*2 08.1*20.25(1)	8 23 39 55 71 m) 4 4 5 5 25 *13.5) *14.5) 5*12.5) 5*12.5) 5*13.5) 1*12.5) 8*9.5) 1*12.5) *12.5) *13.5) 1*12.5) *12.5) *13.5) 1*12.5) *12.5) *13.5) 1*12.5) *13.5) *12.5) *13.5) *13.5) *13.5) *13.5) *13.5) *13.5) *13.5) *13.5) *13.5) *13.5) *13.5) *13.5) *13.5) *13.5) *13.5] *13.5] *13.5] *13.5] *13.5] *13.5] *13.5] *13.5] *13.5] *13.5] *13.5] *13.5] *13.5] *13.5] *13.5] *13.5]	spacin s(m) 18.4 19 19.5 20.25 19 19.5 20.25 19.75 20.25 18.4 19.5 18.4 19.5 18.4 19.5 18.4 19 20.15 20.25 19 20.15 20.25 19 20.15 20.25 19 20.15 20.25	7 26 27 25.5 44.5 45 47.5 63 64 67.95 67 83 88.1 87.9 102 108.25 108.1	Dimension of the Square hole (mm) - - 12*12 12*14.5 12.5*12.5 13.5*13.5 11*12.5 8*9.5 8*9.5 8*9.5 11*12.5 12*12 12.65*12.65 13.5*13.5 11*12.5 12*12 12.65*12.65 13.5*13.5 12*12 12.65*12.65 13.5*13.5	18.5mm Nickel Plated steel strip 128.3 127.9 127.6 47.2 48.9 47. 48.9 47. 48.9 41.1 38.6 27.4 29.1 27.4 29.4 29.4 21. 19.6 21. 38.6 21. 31. 38.6 21. 31. 38.6 21. 31. 31. 21. 40. 38.6 21. 31. 21. 40. 31. 40. 31. 40. 31. 40. 31. 40. 31. 40. 40. 40. 40. 40. 40. 40. 40	Fure Nickel per Kg (m) 112.6 112.1 111.9 41.4 42.9 41.2 42.9 41.2 42.9 41.2 42.9 36.1 33.8 24 25.5 24 21.1 33.8 24 25.5 24 21.1 33.8 24 25.5 24 21.1 33.8 24 25.5 24 21.1 33.8 24 25.5 24 21.1 33.8 24 25.5 24 21.1 33.8 24 25.5 24 21.1 21.1 33.8 24 25.5 24 21.1 21.1 33.8 24 25.5 24 21.1 21.1 31.1 21.1 33.8 24 25.5 24 21.1 21.1 31.1 21.1 33.8 24 25.5 24 21.1 21.1 31.1 21.1 31.1 21.1 32.1 21.1 33.8 24 25.5 24 21.1 21.1 31.1 31.1 21.1 32.1 21.1 32.1 32	Type of ps with J <	xck holder		
Model 1P 2P 3P 4P 5P Type 1P 18650 Nickel str 2P 18650 Nickel str 2P 18650 Nickel str Dislocation 2P 1861 Nickel strip Dislocation 2P 1865 Nickel strip 3P 18650 Nickel str 4P 18650 Nickel str 5P 18650 Nickel str	Thickness 0.15/0.2mr 0.15/0.15/0.2mr 0.	Dimension (r 0.15*7*18. 0.15*7*19. 0.15*7*19. 0.15*7*20. 15*26*19(13.5 15*27*20.25(13.5 15*27*20.25(13.5 15*27*20.25(13.5 15*25.5*18.4 (1 15*25.5*18.4 (1 15*25.5*18.4 (1 15*25.5*18.4 (1 15*25.5*18.4 (1 15*25.5*18.5 (1 15*45419 (12 15*20.15 (12 7.7*20.25 (1 15*83*19 (12 15*102*19 (1) 15*102*19 (1) 15*102*19 (1)	8 23 39 55 71 mm) 4 4 5 25 *13.5) *14.5) 5*12.5) 5*12.5) 8*9.5) 1*12.5) 8*9.5) 1*12.5) 8*9.5) 1*12.5) *12) 65*12.65) 3.5*13.5) 1*12.5 *12) 65*12.65) 3.5*13.5) *12) 65*12.65) 3.5*13.5) *12) 65*12.65) 3.5*13.5) *12) 65*12.65) 3.5*13.5) *12)	space in s(mm) 18. 4 19 19. 5 20. 25 19 19. 5 20. 25 19. 75 20. 25 18. 4 19. 75 20. 25 18. 4 19. 5 20. 25 18. 4 19. 5 20. 15 20. 25 19 20. 15 20. 25 19 20. 15 20. 25 19 20. 15 20. 25 19	7 26 27 25.5 44.5 45 47.5 63 64 67.95 67 83 88.1 87.9 102 108.25 108.1 121	Dimension of the Square hole (mm) - - 12*12 12*14.5 12.5*12.5 13.5*13.5 11*12.5 8*9.5 8*9.5 11*12.5 12*12 12.65*12.65 13.5*13.5 11*12.5 12*12 12.65*12.65 13.5*13.5 12*12 12.65*12.65 13.5*13.5 12*12 12.65*12.65	18.5mm Nickel Plated steel steel 128.3 127.9 127.6 47.2 48.9 47. 48.9 47. 48.9 41.1 38.6 27.4 29.1 27.4 29.1 27.4 29.1 27.4 29.1 21.6 21.3 16.4 19.6 21.3 16.4 19.7 12.5 12.6	Pure Nickel per Kg (m) 112.6 112.1 111.9 41.4 42.9 41.2 42.9 41.2 42.9 42.9 36.1 33.8 24 25.5 24 25.7 18.9 18.4 17.2 18.7 14.4 17.3 14.6 11.9 11	Type of pe with holder J	xck holder		



Shape	Size(mm)
Wire	0.025-10
Ribbon	(0.05-0.2)*(0.5-6)
Strip	(0.05-0.5)*(5-200)

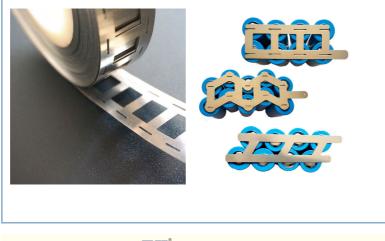

Changzhou Victory Technology Co., Ltd

+8619906119641 Solution
 NO.32 West Taihu Road, Xinbei District, Changzhou, Jiangsu