



High-Performance MI Thermocouple Cable: Mineral Insulated and Fully Certified

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Victory
- Certification: CE, ROHS
- Model Number: Mineral Insulated Cable
- Minimum Order Quantity: 5kg
- Price: \$1.75-\$3.00
- Delivery Time: 5-21 days
- Payment Terms: L/C, D/A, D/P, Western Union, MoneyGram, T/T
- Supply Ability: 300 tons per month



Product Specification

- Highlight: **Fully Certified MI Thermocouple Cable, High Performance MI Thermocouple Cable, Mineral Insulated MI Thermocouple Cable**

for more products please visit us on victory-alloy.com

Product Description



Key attributes

Other attributes

Place of Origin	Jiangsu, China
Brand Name	Victory
Product name	MI Cable
Application	Temperature Measuring
Dia(mm)	0.25mm to 12.7mm
Customized support	OEM, ODM
Insulator	99.6% high purity MgO
Core	2,4,6
Temperature range	0~1100()
Size	Custom Size
Packing	Polyform+giftbox+export Carton
Delivery time	7-20 Days


Packaging and delivery

Selling Units:	Single item
Single package size:	25X25X12 cm
Single gross weight:	20.000 kg

Code	Wire Component of the thermocouple	
	+Positive leg	- Negative Leg
N	Ni-Cr-Si(NP)	Ni-Si-magnesium (NN)
K	Ni-Cr(KP)	Ni-Al(Si) (KN)
E	Ni-Cr(EP)	Cu-Ni (EN)
J	Iron (JP)	Cu-Ni (JN)
T	Copper (TP)	Cu-Ni (TN)
B	Platinum Rhodium-30%	Platinum Rhodium -6%
R	Platinum Rhodium-13%	Platinum
S	Platinum Rhodium -10%	Platinum

Material	Type	Grade	Working temperature (deg)		Tolerance	Standard
			Long Term	Short Term		
NiCr-NiSi	K	1	-40~1100	-40~1300	±1.5 deg	GB/T 2614-1998
		2			±2.5 deg	
NiCr-CuNi	E	1	-40~800	-40~900	±1.5 deg	GB/T 4993-1998
		2			±2.5 deg	
Fe-Constantan	J	1	-40~600	-40~800	±1.5 deg	GB/T 4994-1998
		2			±2.5 deg	
Cu-CuNi	T	1	-200~300	-200~400	±0.5 deg	GB/T 2903-1998

Outer Sheath(mm)		core wire Dia.(mm)		Outer Sheath(mm)o core wire Dia.(mm)				Length(m)
Out Dia	Wall Thickness	K,N,E,J,T Types	S,R,B Types	K,N Types	E,J,T Types	S,R Types	B Types	
0.5	0.05-0.10	0.08-0.12	...	SS304, SS321, SS316, SS310, INCL600	SS30, SS32, SS316	INCL60, INCL800	INCL60, INCL800	500
1.0	0.10-0.20	0.15-0.20	...					300
1.5	0.15-0.25	0.23-0.30	...					200
1.6	0.16-0.26	0.26-0.36	...					200
2.0	0.25-0.35	0.40-0.50	0.25-.030					180
3.0	0.38-0.48	0.50-0.60	0.30-0.40					80
3.2	0.48-0.58	0.58-0.68	0.30-0.40					75
4.0	0.52-0.62	0.60-0.70	0.35-0.40					70
4.8	0.73-0.83	0.75-0.85	0.40-0.45					40
5.0	0.78-0.88	0.80-0.90	0.40-0.45					40
6.0	0.98-1.08	0.90-1.10	0.45-0.50					30
6.4	1.05-1.15	1.02-1.12	0.45-0.50					30
8.0	1.30-1.44	1.30-1.40	0.45-0.50					20
12.7	1.75-1.90	1.95-2.05	...					10

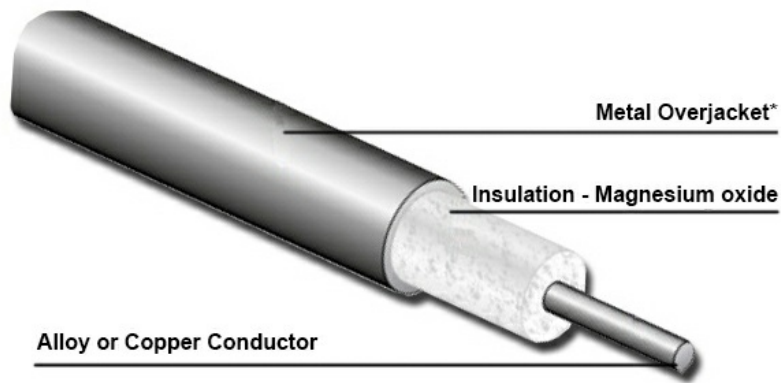

FAQ

Q:I have sent the RFQ, when can I expect a reply?

A:We usually quote within 24 hours after we get your inquiry. If you are urgent to get the price, please send the message on trade management or call us directly.

Q:How long is the delivery time?

A:It depends on the order quantity ,Usually it takes about 20-30 days.

Q:Do you accept OEM/ODM manufacturing?

A:Yes! We do accept OEM/ODMmanufacturing. You could give us your samples or drawings.

Q:Can you send me your catalogue?

A:Yes, please contact us.We can share with our catalogue for you by email.

Q:How to control the products quality in your company?

A:With professional quality team, advanced product quality planning, strict implementation, continuous improvement, the quality of our products is well controlled and consistent.

Q:Can you provide detailed technical data and drawing?

A:Yes, we can. Please tell us which product you need and the applications, we will send the detailed technical data and drawing to you for your evaluation and confirm.



Changzhou Victory Technology Co., Ltd



+8619906119641



victory@dlx-alloy.com



victory-alloy.com

NO.32 West Taihu Road, Xinbei District, Changzhou, Jiangsu